



FLEX-HINGE JOINTS

Strong friction hinges

KINTEC-SOLUTION
technic to relax


A Leggett & Platt. COMPANY




STRONG HINGE JOINTS WITH EXTENSION (+89 mm / +149 mm ASSEMBLED)

Product code
Hinge length
Extension length
Folded width
No. of joints
Connection
Tilt force approx.
Side force approx.
Turning degree
Finish

150 14 10016 11
287 mm [10.11"]
89 mm [3.50"]
112 mm [4.40"]
6
Screwed
50 N
50 N
0° - 180°
SST brushed metal

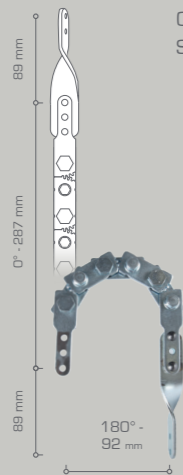

150 14 10026 11
287 mm [10.11"]
149 mm [5.86"]
112 mm [4.40"]
6
Screwed
50 N
50 N
0° - 180°
SST brushed metal


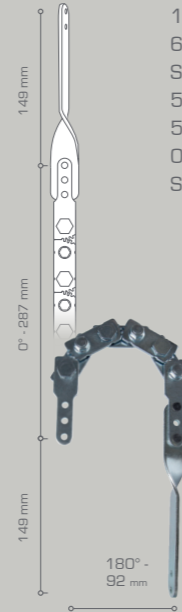


KS FURNITURE HINGES



ACCESSORIES HEADREST CONNECTION BAR

Stainless steel cross headrest connection bar, available in various widths.



ACCESSORIES HINGE EXTENSIONS (+89 mm / +149 mm ASSEMBLED)

Product code
Length
Extension length
Finish

991 10 00218 10
136 mm [5.35"]
89 mm [3.50"]
SST brushed metal




991 10 00135 10
196 mm [7.71"]
149 mm [5.86"]
SST brushed metal




ACCESSORIES BRACKETS

Product code
Length
Finish

990 40 00088 10
65 mm [2.55"]
SST brushed metal



991 10 00134 10
130 mm [5.11"]
SST brushed metal



Flex Hinge Joints



Hinge Extension



Place your order by contacting us on:

+49 5244 9079 50

Order.Kintec@Leggett.com






FLEX-HINGE JOINTS

Soft and medium friction hinges


SOFT HINGE JOINTS (SIDE FORCE 50 N; TILT FORCE 25 N, 30 N, 35 N)

Product code	150 15 00005 10	150 15 00006 10	150 15 00007 10
Length	257 mm [10.11"]	287 mm [11.29"]	317 mm [12.48"]
Folded width	92 mm [3.62"]	112 mm [4.40"]	131 mm [5.15"]
No. of joints	5	6	7
Connection	Riveted	Riveted	Riveted
Tilt force approx.	35 N	30 N	25 N
Turning degree	0° - 180°	0° - 180°	0° - 180°
Finish	SST brushed metal	SST brushed metal	SST brushed metal




MEDIUM HINGE JOINTS (SIDE FORCE 50 N; TILT FORCE 50 N, 70 N, 90 N)


Product code [Tilt force approx.]	150 14 10006 11 (50 N) 150 14 10006 12 (70 N) 150 14 10006 13 (90 N)
Length	287 mm [11.29"]
Folded width	112 mm [4.40"]
No. of joints	6
Connection	Screwed
Turning degree	0° - 180°
Finish	SST brushed metal



Product code [Tilt force approx.]	150 14 10206 11 (50 N) 150 14 10206 12 (70 N) 150 14 10206 13 (90 N)
Length	287 mm [11.29"]
Folded width	112 mm [4.40"]
No. of joints	6
Connection	Screwed
Turning degree	90° - 180°
Finish	SST brushed metal



Product code [Tilt force approx.]	150 14 10106 11 (50 N) 150 14 10106 12 (70 N) 150 14 10106 13 (90 N)
Length	287 mm [11.29"]
Folded width	112 mm [4.40"]
No. of joints	6
Connection	Screwed
Turning degree	180° - 180°
Finish	SST brushed metal



Product code [Tilt force approx.]	150 14 100003 12 (70 N)
Length	197 mm [7.75"]
Folded width	98 mm [3.85"]
No. of joints	3
Connection	Screwed
Turning degree	0° - 180°
Finish	SST brushed metal




FLEX-HINGE JOINTS


Strong friction hinges

STRONG HINGE JOINTS (SIDE FORCE 275 N; TILT FORCE 70 N, 90 N, 110 N)

Product code [Tilt force approx.]	150 14 20006 12 (70 N) 150 14 20006 13 (90 N) 150 14 20006 14 (110 N)
Length	287 mm [11.29"]
Folded width	112 mm [4.40"]
No. of joints	6
Connection	Screwed
Turning degree	0° - 180°
Finish	SST brushed metal



Product code [Tilt force approx.]	150 14 20206 12 (70 N) 150 14 20206 13 (90 N) 150 14 20206 14 (110 N)
Length	287 mm [11.29"]
Folded width	112 mm [4.40"]
No. of joints	6
Connection	Screwed
Turning degree	90° - 180°
Finish	SST brushed metal



Product code [Tilt force approx.]	150 14 20106 12 (70 N) 150 14 20106 13 (90 N) 150 14 20106 14 (110 N)
Length	287 mm [11.29"]
Folded width	112 mm [4.40"]
No. of joints	6
Connection	Screwed
Turning degree	180° - 180°
Finish	SST brushed metal

